


■ NDS F 7288C 5Kフランジ



SOP形

BL形

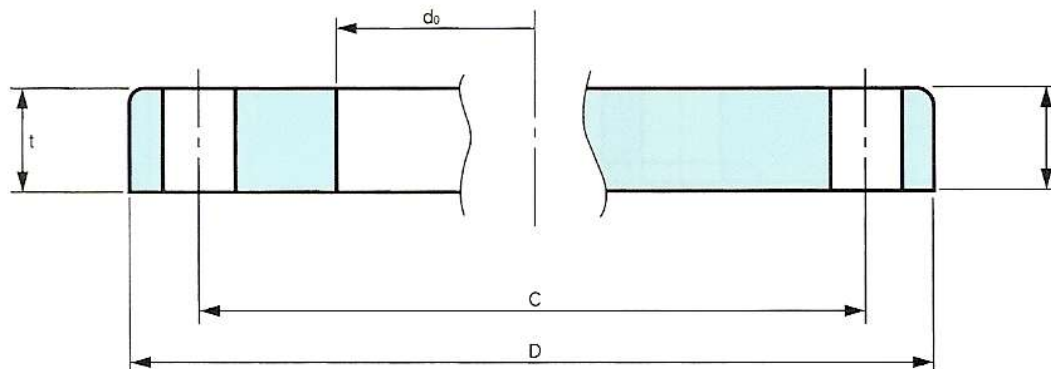

単位：mm

呼び径		適用管の 外径	外径 D	内径 d_0	厚み t	ボルト穴			重量 (kg)	
						中心径 C	数	径	SOP形	BL形
A	B	外径	D	d_0	t	C			SOP形	BL形
10	3/8	17.3	70	17.8	9	50	4	12	0.20	0.24
15	1/2	21.7	75	22.2	9	55	4	12	0.25	0.28
20	3/4	27.2	80	27.7	10	60	4	12	0.31	0.36
25	1	34.0	85	34.5	10	65	4	12	0.34	0.41
32	1 1/4	42.7	105	43.2	12	80	4	15	0.61	0.75
40	1 1/2	48.6	110	49.1	12	85	4	15	0.65	0.83
50	2	60.5	125	61.0	14	100	4	15	0.95	1.28
65	2 1/2	76.3	145	76.9	14	120	4	15	1.23	1.75
80	3	89.1	155	89.7	14	130	6	15	1.26	1.97
90	3 1/2	101.6	165	102.2	14	140	6	15	1.33	2.30
100	4	114.3	180	114.9	16	155	6	15	1.76	3.10
125	5	139.8	225	140.6	16	190	6	19	2.83	4.80
150	6	165.2	255	166.6	18	220	8	19	3.83	6.90
175	7	190.7	280	191.5	18	245	8	19	4.31	8.43
200	8	216.3	300	217.1	20	265	12	19	4.75	10.62
225	9	241.8	320	242.8	20	285	12	19	4.82	12.16
250	10	267.4	370	268.4	22	330	12	23	7.93	17.81
300	12	318.5	420	319.5	22	380	12	23	9.21	23.19