
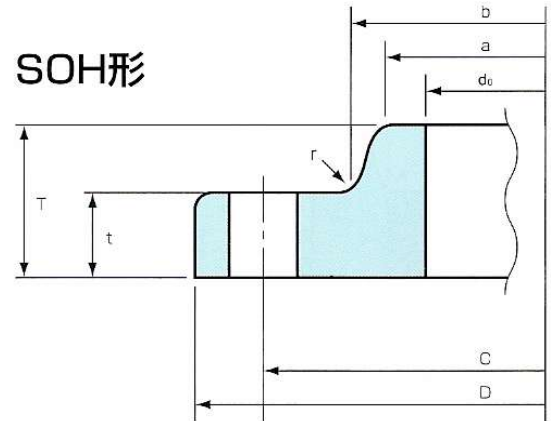


# ■ NDS F 7290C 10Kフランジ

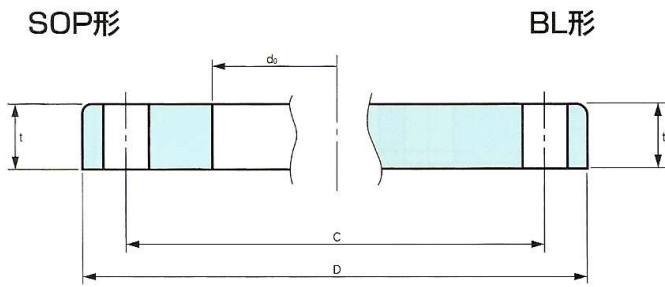

単位：mm

呼び径		適用管の 外径	外径 D	内径 d <sub>0</sub>	厚み t	全長 T	ハブ部分			ボルト穴		重量 (kg)			
							ハブ先 a	ハブ元 b	半径 r	中心径 C	数	径	SOP形	SOH形	BL形
A	B	外径	D	d <sub>0</sub>	t	T	a	b	r	C	数	径	SOP形	SOH形	BL形
10	3/8	17.3	80	17.8	10	-	-	-	-	55	4	15	0.32	-	0.34
15	1/2	21.7	85	22.2	10	-	-	-	-	60	4	15	0.36	-	0.39
20	3/4	27.2	95	27.7	12	-	-	-	-	70	4	15	0.54	-	0.60
25	1	34.0	100	34.5	12	-	-	-	-	75	4	15	0.58	-	0.68
32	1 1/4	42.7	110	43.2	14	-	-	-	-	85	6	15	0.77	-	0.93
40	1 1/2	48.6	115	49.1	14	-	-	-	-	90	6	15	0.82	-	1.03
50	2	60.5	130	61.0	16	-	-	-	-	105	6	15	1.17	-	1.54
65	2 1/2	76.3	150	76.9	16	-	-	-	-	125	6	15	1.50	-	2.10
80	3	89.1	175	89.7	16	-	-	-	-	140	6	19	2.01	-	2.82
90	3 1/2	101.6	185	102.2	16	-	-	-	-	150	6	19	2.13	-	3.18
100	4	114.3	200	114.9	18	-	-	-	-	165	8	19	2.65	-	4.14
125	5	139.8	230	140.6	18	-	-	-	-	195	8	19	3.35	-	5.58
150	6	165.2	260	166.0	20	-	-	-	-	225	12	19	4.40	-	7.85
175	7	190.7	295	191.5	20	38	208	212	10	255	12	23	-	6.35	10.00
200	8	216.3	320	217.1	22	42	232	236	10	280	12	23	-	7.80	13.10